



a company of **SACMI**

Your carton packaging solution !

Closer ETL700



OVERVIEW

- Multiformat box closer
- Closing by hot-melt or tuck-in
- Servodriven turning section
- Dealing with cardboard as well as micro-fluted
- Applications: Boxes with lid
- 3 flaps or 1 front flap
- Right or left-hand drive version
- Options: control and rejection of not glued boxes , inkjet marker integration, etc.




CARACTERISTIQUES TECHNIQUES

- Infeed conveyor for boxes gating
- Servodriven first step for lid and front flap closing
- Servodriven turning section
- Servodriven second step for side flaps closing
- HMI up to 15,6"
- Servodriven motors
- Multi-brand Ethercat communication
- Stainless steel frame
- Dimensions : 4200 x 1300 x 2050 mm
- IP54
- Power supply: 6 kW
- Air supply: 6 bars
- Mini/maxi boxes dimensions:
 - Length : 100 – 310 mm / 3,94" – 12,2"
 - Width : 85 – 310 mm / 3,35" – 12,2"
 - Height : 20 – 150 mm / 0,79" – 5,91"

ACCURACY
& SQUARENESS

JUSQU'À 90
BOÎTES/ MIN

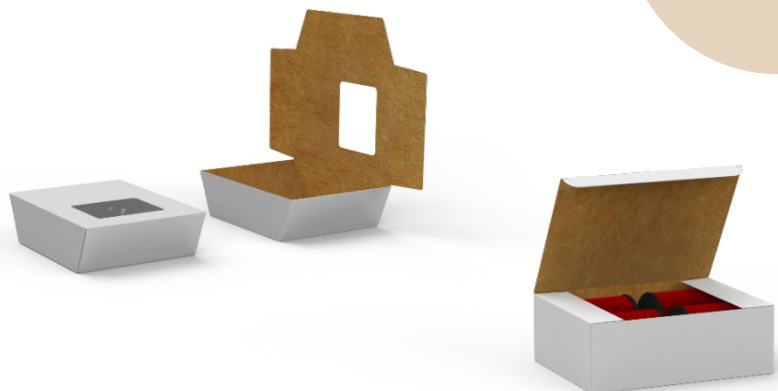

ETPACK
5 rue Louis Blériot
29170 Saint-Evarzec
France
T: +33 298 946 999
www.et-pack.com